


The instruction of setting TAB for all scanners

1. Please setting the “ Suffix characters ” in order to have “TAB” function. The setting steps are as below.

## String setting / Transmission (Prefix / Suffix)

**Prefix / Suffix characters setting:** Characters defined as prefix or suffix characters will be transmitted immediately with the scanned data for all symbologies. Up to 22 ASCII characters can be defined as Prefix or Suffix.

### Format of barcode data transmission:

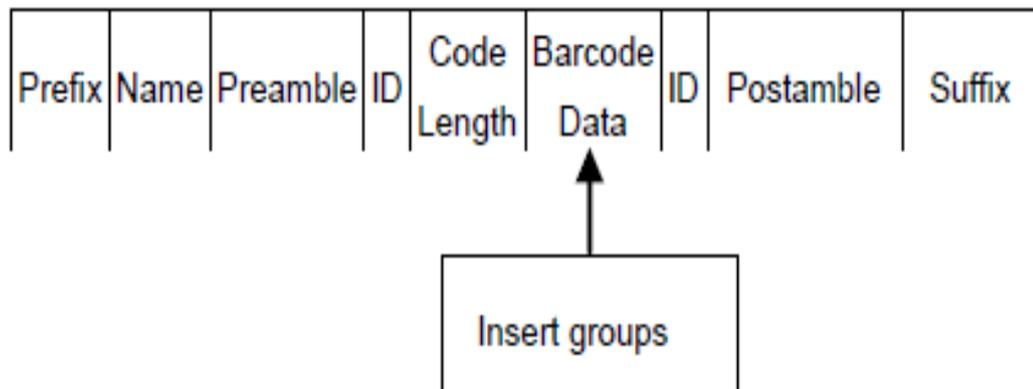

2. Please scanning barcodes as below in sequence for setting TAB function.

1.



Option Bar Code	Option	Alphanumeric Entry
 *8AA* Prefix characters setting	None 1-22 characters	00 * 00-ffH ASCII code
 *8AB* Suffix characters setting	None 1-22 characters	0D * 00-ffH ASCII code

2.

3.



3.

2.1



2.2



2.3

