


設定結尾帶 Enter

How to make Argox scanner AS、AR series data end as Enter.

1. 請先至 Argox 官網下載使用手冊。

Please download User's Manual from Argox official website as below.

http://www.argox.com/product/ar-3100/#tab-ywtm_1099

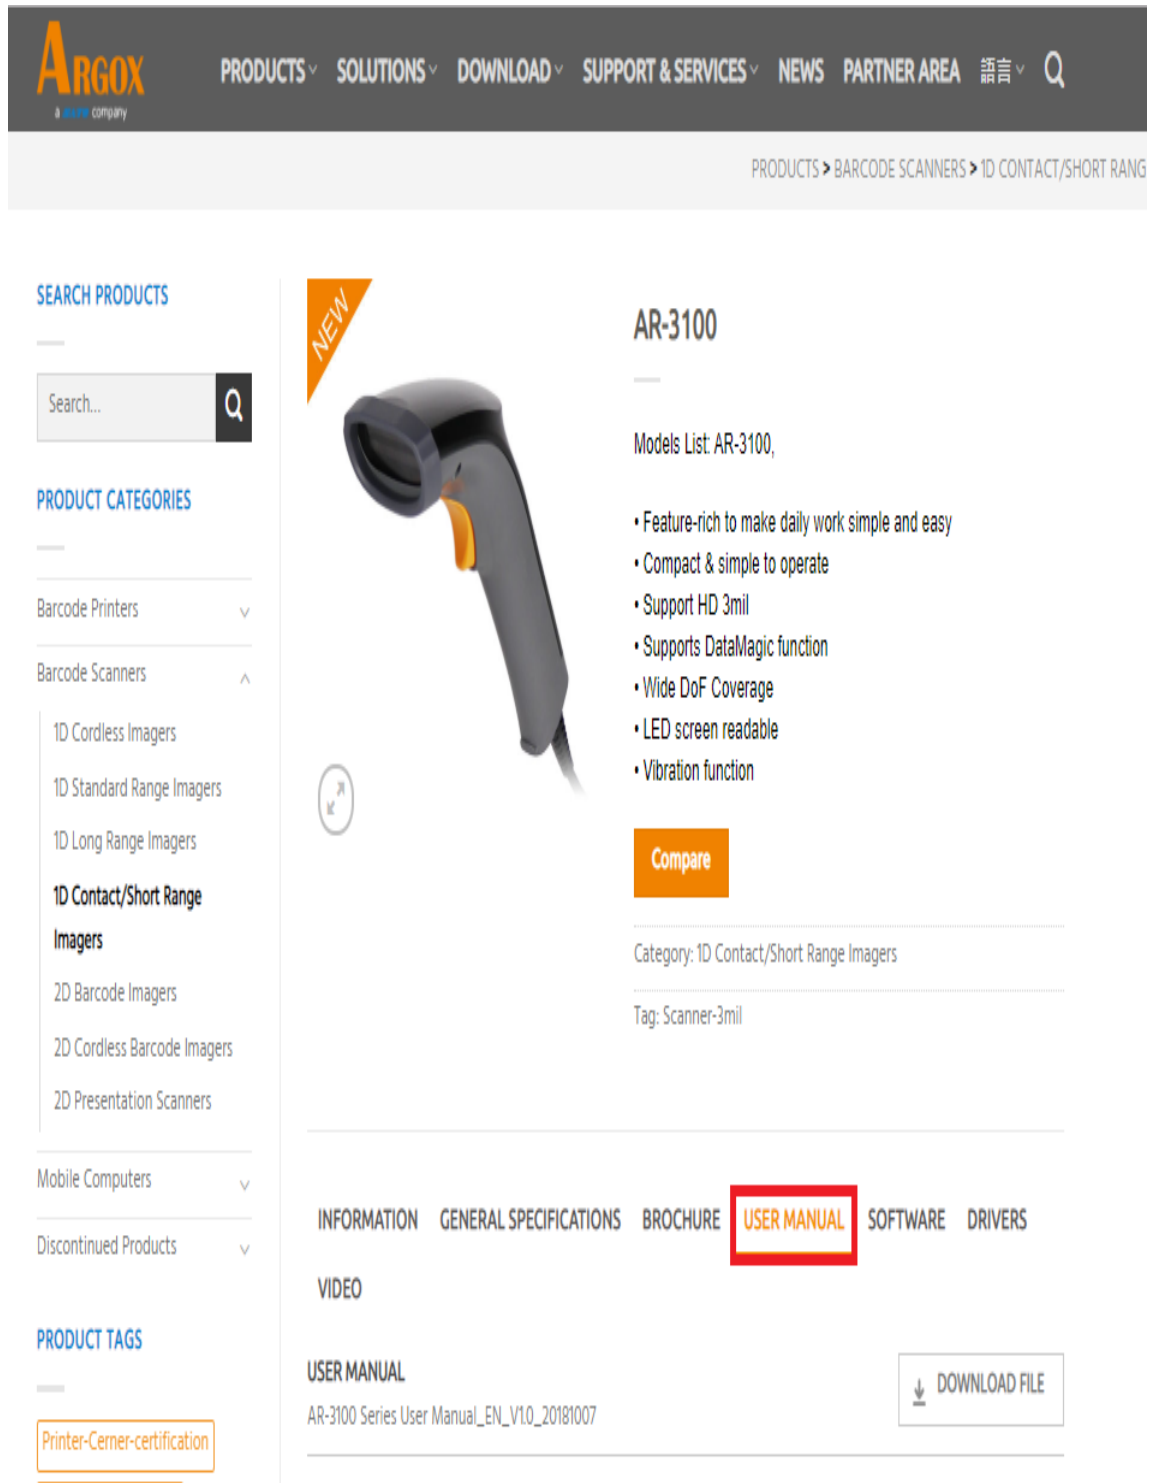

ARGOX
a harsco company

PRODUCTS ▾ SOLUTIONS ▾ DOWNLOAD ▾ SUPPORT & SERVICES ▾ NEWS PARTNER AREA 語言 ▾ 🔍

PRODUCTS > BARCODE SCANNERS > 1D CONTACT/SHORT RANG

SEARCH PRODUCTS

Search... 🔍

PRODUCT CATEGORIES

Barcode Printers ▾

Barcode Scanners ▴

1D Cordless Imagers

1D Standard Range Imagers

1D Long Range Imagers

1D Contact/Short Range Imagers

2D Barcode Imagers

2D Cordless Barcode Imagers

2D Presentation Scanners

Mobile Computers ▾

Discontinued Products ▾

PRODUCT TAGS

Printer-Cerner-certification

NEW

AR-3100

Models List: AR-3100,

- Feature-rich to make daily work simple and easy
- Compact & simple to operate
- Support HD 3mil
- Supports DataMagic function
- Wide DoF Coverage
- LED screen readable
- Vibration function

Compare

Category: 1D Contact/Short Range Imagers

Tag: Scanner-3mil

INFORMATION GENERAL SPECIFICATIONS BROCHURE **USER MANUAL** SOFTWARE DRIVERS

VIDEO







USER MANUAL

AR-3100 Series User Manual_EN_V1.0_20181007

↓ DOWNLOAD FILE

2. 請依照下面條碼由上而下依順序掃描設定
 (參數頁字元條碼 0~9, A~F 在最後一頁, 參數字元每次必須掃讀兩個字元, 參數輸入完畢必須掃描 Finish 條碼)

Please following the instruction as below and also refer to the User's Manual on P.25.

| Function Description | | Double "Enter" as data suffix |
|----------------------|---------------------------------------|---|
| Step | Option Description | Option Barcode |
| 1 | Program(起始設定) |  *%+PRO* |
| 2 | Suffix Characters Setting (選擇設定項目) |  *8AB* |
| 3 | Parameter " 0 " (掃描 ASCII 碼第一個字元) |  */0* |
| 4 | Parameter " D " (掃描 ASCII 碼第二個字元) |  */D* |
| 5 | Finish(結束參數掃描) |  *%%%* |
| 6 | Exit(離開設定) |  *%\$\$* |

設定結尾取消 Enter







How to make Argox scanner AS、AR series data end as Enter

Removed.

1. 請依照下面條碼由上而下依順序掃描設定<<

(參數頁字元條碼 0~9, A~F 在最後一頁, 參數字元每次必須掃讀兩個字元, 參數輸入完畢必須掃描 Finish 條碼)

Please following the instruction as below and also refer to the User's Manual on P.25

| Function Description | | Cancel "Enter" as data suffix |
|----------------------|---------------------------------------|--|
| Step | Option Description | Option Barcode |
| 1 | Program(起始設定) |  *\${}+PRO* |
| 2 | Suffix Characters Setting (選擇設定項目) |  *8AB* |
| 3 | Parameter "0" (掃描 ASCII 碼第一個字元) |  */0* |
| 4 | Parameter "0" (掃描 ASCII 碼第二個字元) |  */0* |
| 5 | Finish(結束參數掃描) |  *%*%* |
| 6 | Exit(離開設定) |  *%\$\$* |